

# GUARDALL

## IN FLOOR SAFES

### MODEL GUAD

FITTED WITH A LAGARD 33E 6 DIGIT TOUCH PAD POWERED BY ONE 9V ALKALINE BATTERY.

### MODEL GUAC

FITTED WITH S & G 3 WHEEL 1 MILLION CHANGE COMBINATION

### MODEL GUAK

FITTED WITH A SIX LEVER PICK RESISTANT KEY LOCK

- SPRING ASSISTED DOOR PIVOT
- REMOVABLE DOORS INTERCHANGE
- HARD PLATE TO PROTECT LOCK AREA
- EMERGENCY RELOCKING DEVICE

	EXTERNAL	INTERNAL	WEIGHT
HEIGHT	390	260	25kg
BASE	350 X 375 DEPTH WIDTH	270 X 295 DEPTH WIDTH	
PRICE	\$	\$	
MODEL	GUAD	GUAC	
INSTALLATION \$			

**MADE IN AUSTRALIA**

**SUGGESTED INSURABLE CASH RATING FOR GUARDALL FLOOR SAFES IN AN UNSUPPORTED (NO ALARMS) DOMESTIC SITUATION IS \$10,000.**



**CMI SAFE CO.** A.C.N. 057 073 033

Head Office: 244 WEST STREET, CARLTON, N.S.W. 2218

Phone: (02) 9547 1488 (5 LINES) Fax: (02) 9547 2104

Web Site: <http://www.cmisafe.com.au> Email: [sales@cmisafe.com.au](mailto:sales@cmisafe.com.au)

Agents in all major cities throughout Australia.



MEMBER AUSTRALIAN SECURITY INDUSTRY ASSOCIATION LIMITED

CD PONT 006 KB 1901

# GUARDALL

## IN FLOOR SAFES

### RECOMMENDED INSTALLATION PROCEDURE.




The safes may be installed in either concrete or timber floors. The opening in the floor should be at least 500mm square by 500mm deep.

The safe should be secured with a strong mix concrete 1 x sand, 1 x stone, 1 x cement. Steel reinforcing material can also be used to help bond the concrete and provide better security.

It is recommended that the mix be poured so that a concrete cover of at least 100mm (4") exists around each side of the safe and brought level with top.

Floor safes are not waterproof. In damp situations the concrete should contain a waterproofing agent such as "Silasec" or "Yurite" (available from hardware stores). Whilst the concrete is setting, the door should be removed.

**INTERCHANGEABLE DOOR REMOVES TO FACILITATE SERVICE & INSTALLATION.**

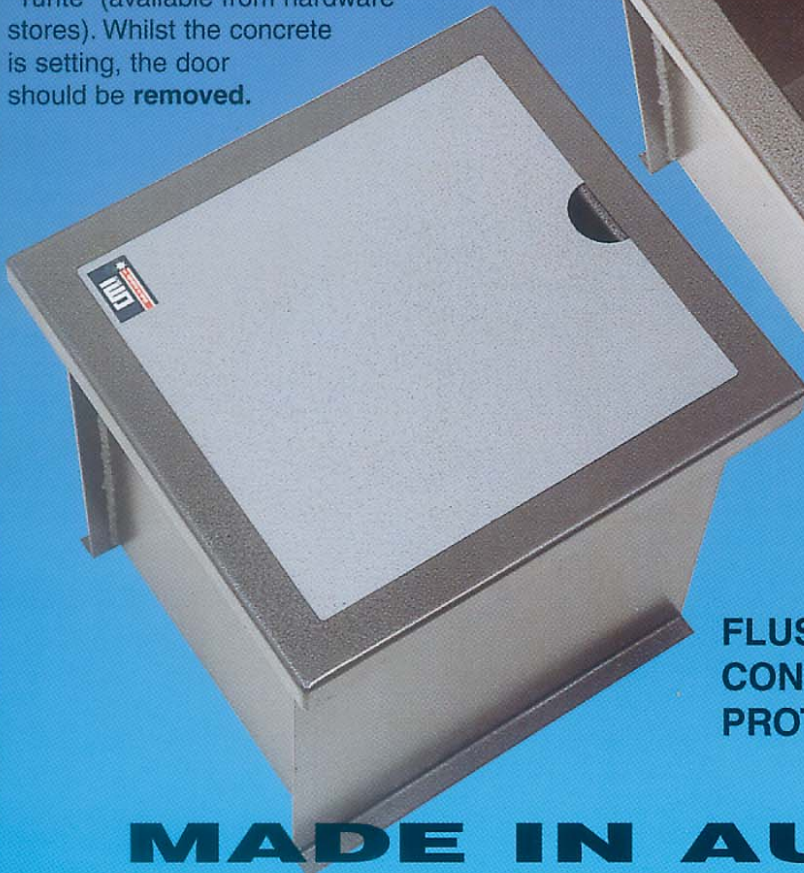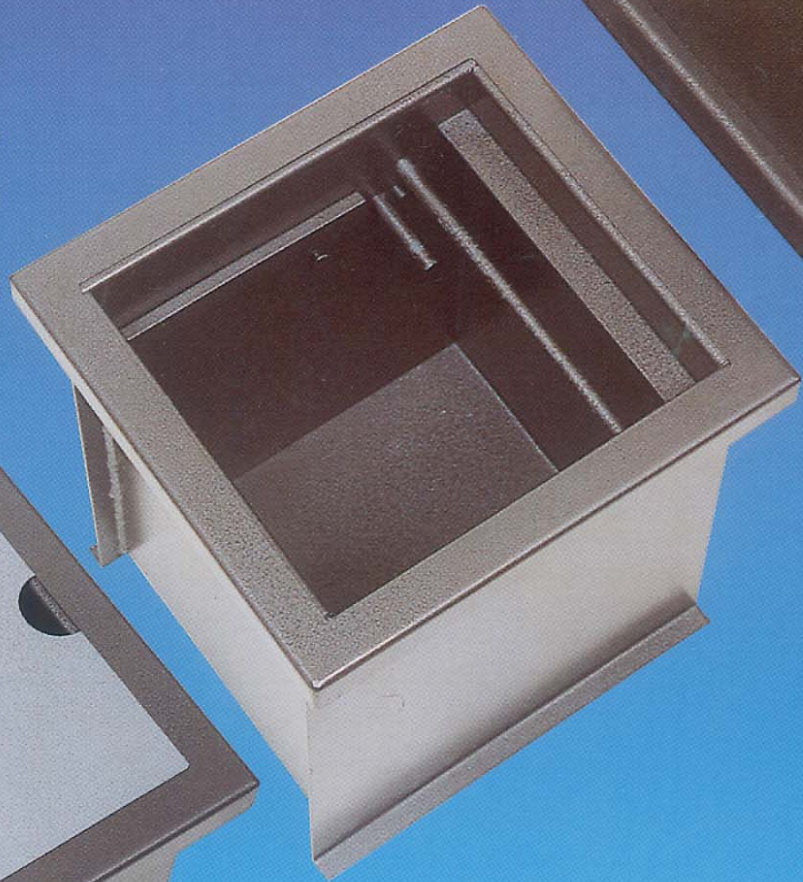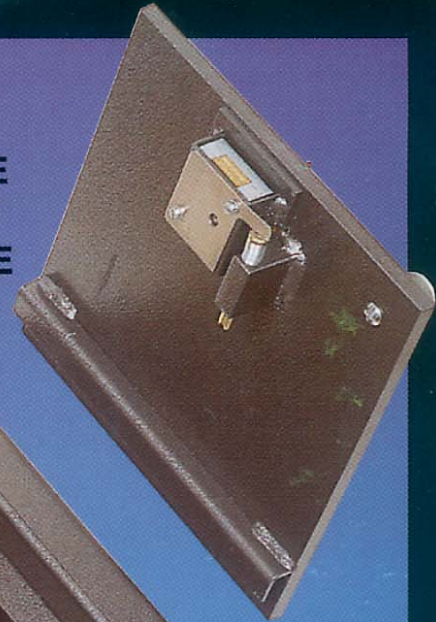

**FLUSH FITTING LID TO AID CONCEALMENT AND FIRE PROTECTION.**

## MADE IN AUSTRALIA

**ALL CMI SAFES COME WITH A FIVE YEAR WARRANTY, EXCLUDING FREIGHT & TRAVELLING, WITH A 12 MONTH WARRANTY ON LOCKS.**



**CMI**  
SAFE CO

**CMI SAFE CO.** A.C.N. 057 073 033

Head Office: 244 WEST STREET, CARLTON, N.S.W. 2218

Phone: (02) 9547 1488 (5 LINES) Fax: (02) 9547 2104

Web Site: <http://www.cmisafe.com.au> Email: [sales@cmisafe.com.au](mailto:sales@cmisafe.com.au)

Agents in all major cities throughout Australia.

**ASIAL**  
MEMBER AUSTRALIAN SECURITY  
INDUSTRY ASSOCIATION LIMITED



CD PONT 006 KB 1901